
The atlas grows.

A quick look at the new worlds and how to explore them.

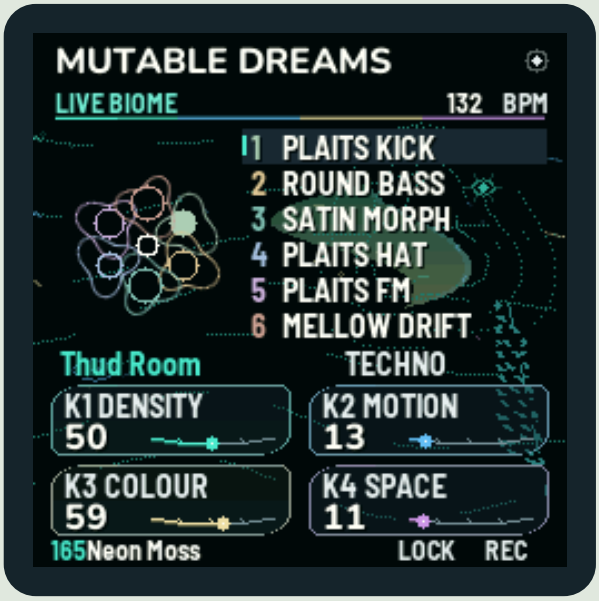

169

Biomes including Blank

364

tone starting points

12 NEW WORLDS

Existing User Banks stay in place.

Four ways into the new palette

Obsidian Tide

deep, slow water and low resonance

Night Hearth

warm percussion with velvet motion

Neon Moss

rhythmic growth and bright detail

Felt Labyrinth

soft-edged paths and granular air

Signals become music.

Bring another MIDI instrument, controller or computer to the FM-1.

ON THE FM-1

GLO > WIRELESS MIDI

K1 RADIO	Switch BLE MIDI on after stopping playback.
K2 DEVICE	Search for eight seconds, then choose a MIDI device.
K3 LINK	Connect or release the selected device.
K4 MIDI THRU	Forward received MIDI when needed.

A first connection

01 Stop the sequence, open Wireless MIDI and turn K1 right.

02 On a phone, tablet or computer, connect to the FM-1 BLE MIDI service.

03 Set a track's MIDI channel on MIDI / PERFORMANCE; send notes or CC.

04 For external clock, select BLE on MIDI / PERFORMANCE.

TESTED ON A PHYSICAL FM-1

Notes, CC74, Start, Clock and Stop arrived over BLE from a Mac.

FM-1-to-external-device linking still needs a separate controller test.

Keep your worlds.

Make a backup before every change of firmware.

1. Save what is yours

Save the current Biome on the FM-1. Download a complete .mddb User Bank backup and export the live patch as JSON if it contains unsaved changes. Browser-only saves are separate.

2. Install from the right page

Use the matching Mutable Dreams installer, choose only the intended FM-1 and keep USB connected until writing has finished. Do not use M-UPGRADE for the custom package; it rejected earlier Mutable Dreams packages.

3. Verify the restart

Check for identity FM-1_710010500. The revised updater restarted and returned USB MIDI automatically in the final physical test. If a device does not return after writing is complete, power it off, disconnect USB for five seconds, then verify again. Never disconnect during writing.

4. Return to stock if needed

The installer provides the original V15 return path. Returning to V15 erases Mutable Dreams User Banks and preferences. Reinstall a compatible Mutable Dreams version before restoring .mddb; the FM-1 requires a physical SEL confirmation.

COMPATIBILITY NOTES

User-tested release 1.5. Back up before updating.

A newer UC25HQ80 FM-1 and BLE central role still need physical tests.